

KLD-1562K

15.6inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- 15.6inch LED TFT LCD, capacitive touch
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- 4*COM, 2*LAN, 3*USB2.0, 1*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Onboard DDR3L, max 4GB	
	Storage	1*mSATA SSD Full Size + 2.5inch SATA HDD	
	I/O ports		3xUSB2.0+1xUSB3.0, Type-A
			COM: 4xRS232, DB9, 2*RS485 optional
			Dual Display: 1xHDMI (3840*2160 @30Hz) 1*VGA (1920*1200 @30Hz)
		Audio: 1xMic-in, 1x Line-out	
	Expansion: MINI-PCIE		
Network(LAN)	2x 10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC(Aviation Connector) , optional 9V-36V DC	
	Control SW/LED	Power Button, AT & ATX Model	
LCD Display	Display Type:	15.6inch TFT LED Panel(LED Backlight)	
	Max. Resolution:	1920x1080/ 16:9	
	Luminance(cd/m ²)	300-1000nits	
Touchscreen	Touch Type	Capacitive Touch	
OS Support	OS Support	Microsoft Windows 7/ Windows 8/ Windows 10/ Linux	
Environment	Operating Temperature	-10°C ~ 60°C(14~ 140 °F)(extend temperature optional)	

	Storage Temperature	-20°C ~ 70°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(W*D*H): 396.5x246x69.5mm; Mounting Cut out (W*H): 379.2*228.7mm
	Weight	6.9KG N.W.
	Color	Black
	Material	Aluminum

Dimensions

Unit: mm

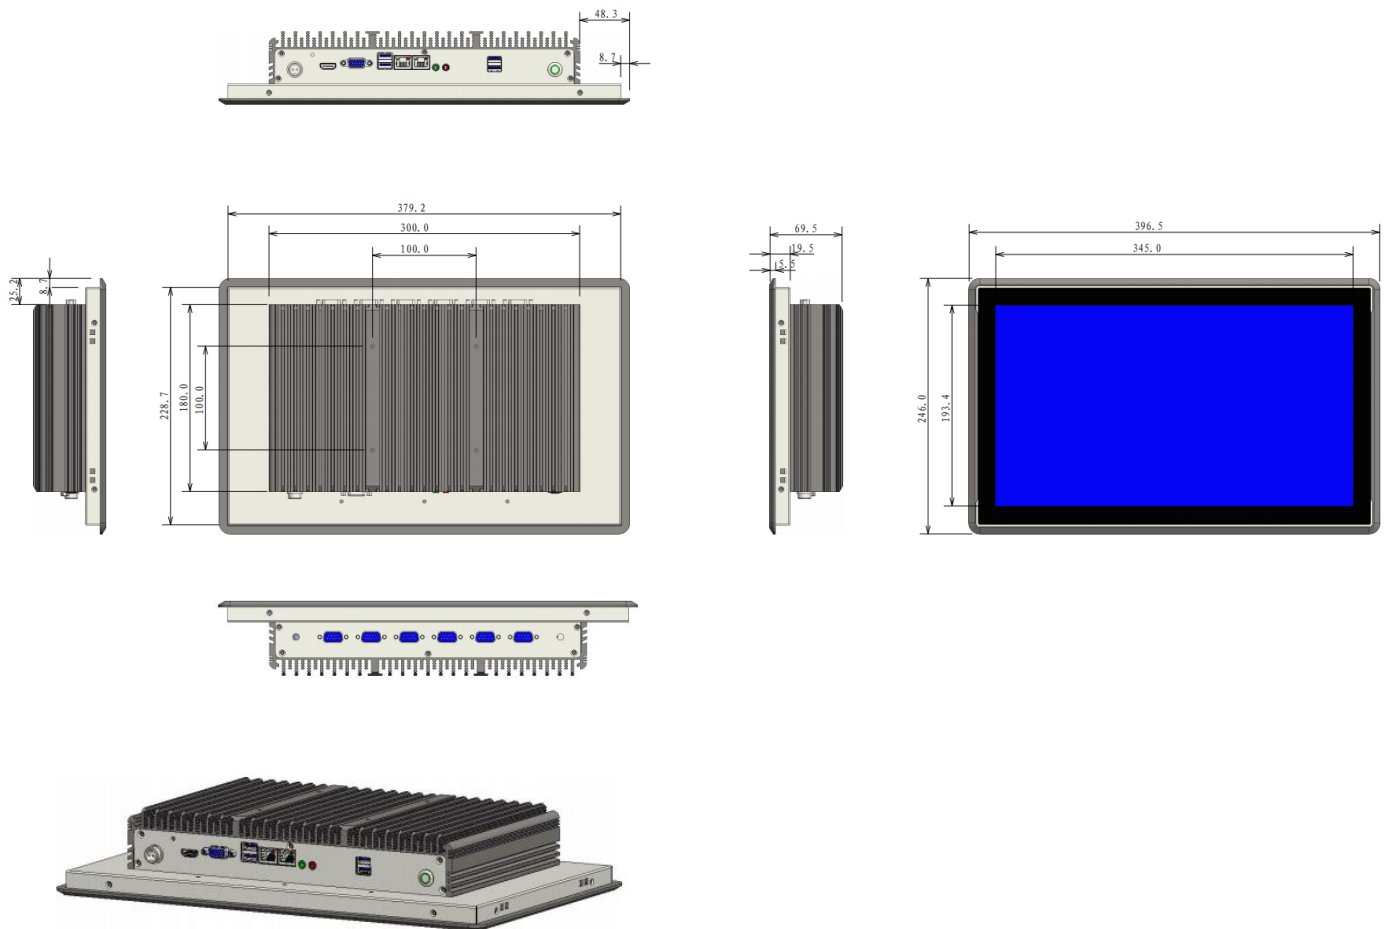



Packing List	Ordering Information
1x KLD-1562K	KLD-1562K: Projected Capacitive Touch Version
1x Driver CD	Operating Systems
1x Power Adapter	WIN7 32bit 64bit EN
Optional accessories	WIN8 32bit 64bit EN
VESA Bracket	WIN10 32bit 64bit EN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04