

KLD-0762A

7inch Industrial Panel PC



Features

- Intel Baytrail Celeron J1900 2.0-2.4GHz CPU
- 7inch LED Panel with Capacitive touchscreen
- Onboard memory up to 4GB DDR3
- 1*VGA, 1* HDMI, Dual independent display
- Aluminum die-casting chassis, fanless design
- Front Panel IP65 Level
- Supports Win 7/ Win 8/ Win 10/ Linux OS


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Onboard DDR3L, max 4GB	
	Storage	1*mSATA SSD Full Size	
	I/O ports		3xUSB2.0+1xUSB3.0, Type-A
			COM: 2xRS232, DB9 1*RS485, DB9, (12V DC power supply optional)
			Dual Display: 1xHDMI (1920*1200 @30Hz) 1*VGA (1920*1200 @30Hz)
		Audio: 1×Mic-in, 1x Line-out	
Network(LAN)	Expansion: MINI-PCIE		
Network(LAN)	2x Intel i211 10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC (2 Pin Aviation Connector) , optional 9V-36V DC	
LCD Display	Display Type:	7inch TFT LED Panel, active size (L*H) 153.4x92mm	
	Max. Resolution:	1024x600 / 16:9	
	Luminance(cd/m ²)	300nits	
Touchscreen	Touch Type	Projected Capacitive Touch	
OS Support	OS Support	Microsoft Windows 7/ Windows 8/ Windows 10/ Linux	

Environment	Operating Temperature	-10°C ~ 60°C (14~ 140 °F) (extend temperature optional)
	Storage Temperature	-20°C ~ 70°C (-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(L*W*H): 209x154x35.4mm, cutout size (L*H) 196.2x139.6mm
	Weight	N.W. 1.35KG
	Color	Sliver
	Material	High Strength Aluminum Alloy
	Certification	CE / CCC

Dimensions

Unit: mm

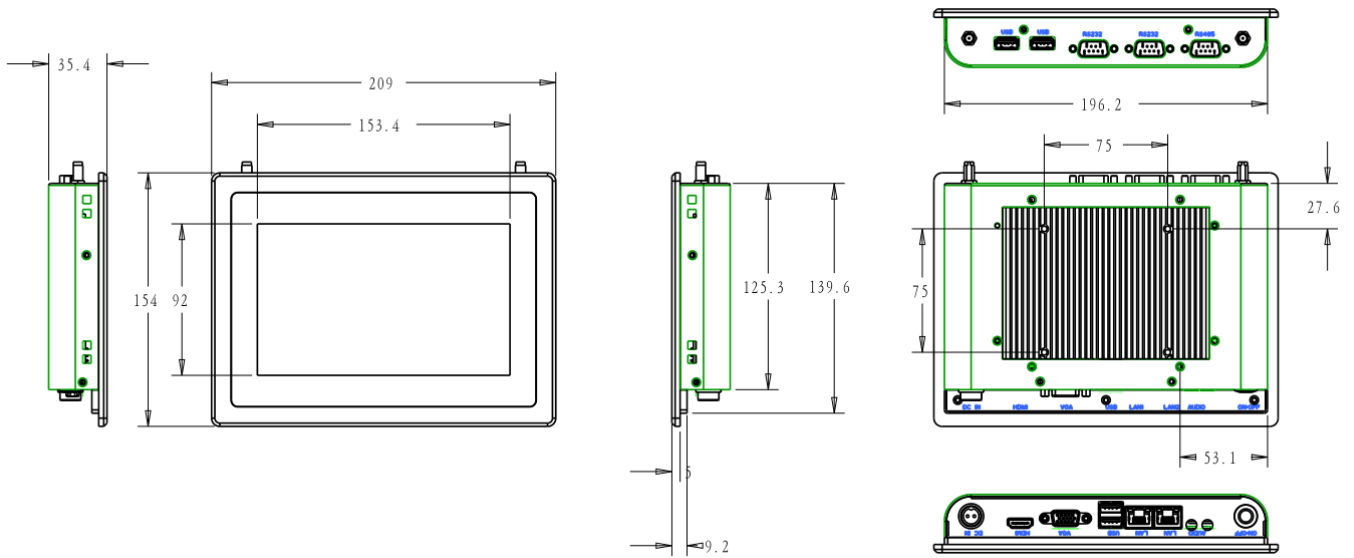



Packing List	Ordering Information
1x KLD-0762A	KLD-0762A: Capacitive Touch Version
1x Driver CD	Operating Systems
1x Power Adapter (12V 5A)	WIN7 32bit 64bit EN
VESA Bracket & Buckles	WIN8 32bit 64bit EN
Optional accessories	WIN10 32bit 64bit EN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04