

KLD-1762K

17.3inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- 17.3inch LED TFT LCD, capacitive touch
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- 4*COM, 2*LAN, 3*USB2.0, 1*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional




KLD-1762K is an intelligent, fanless panel PC, 17.3" Panel PC equipped with an Intel® Celeron J1900 processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 4 x serial ports, 4 x USB ports, make device connection and integration easy.

Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Onboard DDR3L, max 4GB	
	Storage	1*mSATA SSD Full Size + 2.5inch SATA HDD	
	I/O ports		3xUSB2.0+1xUSB3.0, Type-A
			COM: 4xRS232, DB9, 2*RS485 optional
			Dual Display: 1xHDMI (3840*2160 @30Hz) 1*VGA (1920*1200 @30Hz)
			Audio: 1×Mic-in, 1x Line-out
Network(LAN)	Expansion: MINI-PCIE		
Network(LAN)	2x 10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC(Aviation Connector) , optional 9V-36V DC	
	Control SW/LED	Power Button, AT & ATX Model	
LCD Display	Display Type:	17.3inch TFT LED Panel(LED Backlight)	
	Max. Resolution:	1920x1080/ 16:9	
	Luminance(cd/m ²)	300-1000nits	
Touchscreen	Touch Type	Capacitive Touch	
OS Support	OS Support	Microsoft Windows 7/ Windows 8/ Windows 10/ Linux	
Environment	Operating Temperature	-10°C ~ 60°C(14~ 140 °F)(extend temperature optional)	

	Storage Temperature	-20°C ~ 70°C (-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	437x270x69mm
	Weight	5.8KG N.W.
	Color	Black
	Material	Aluminum

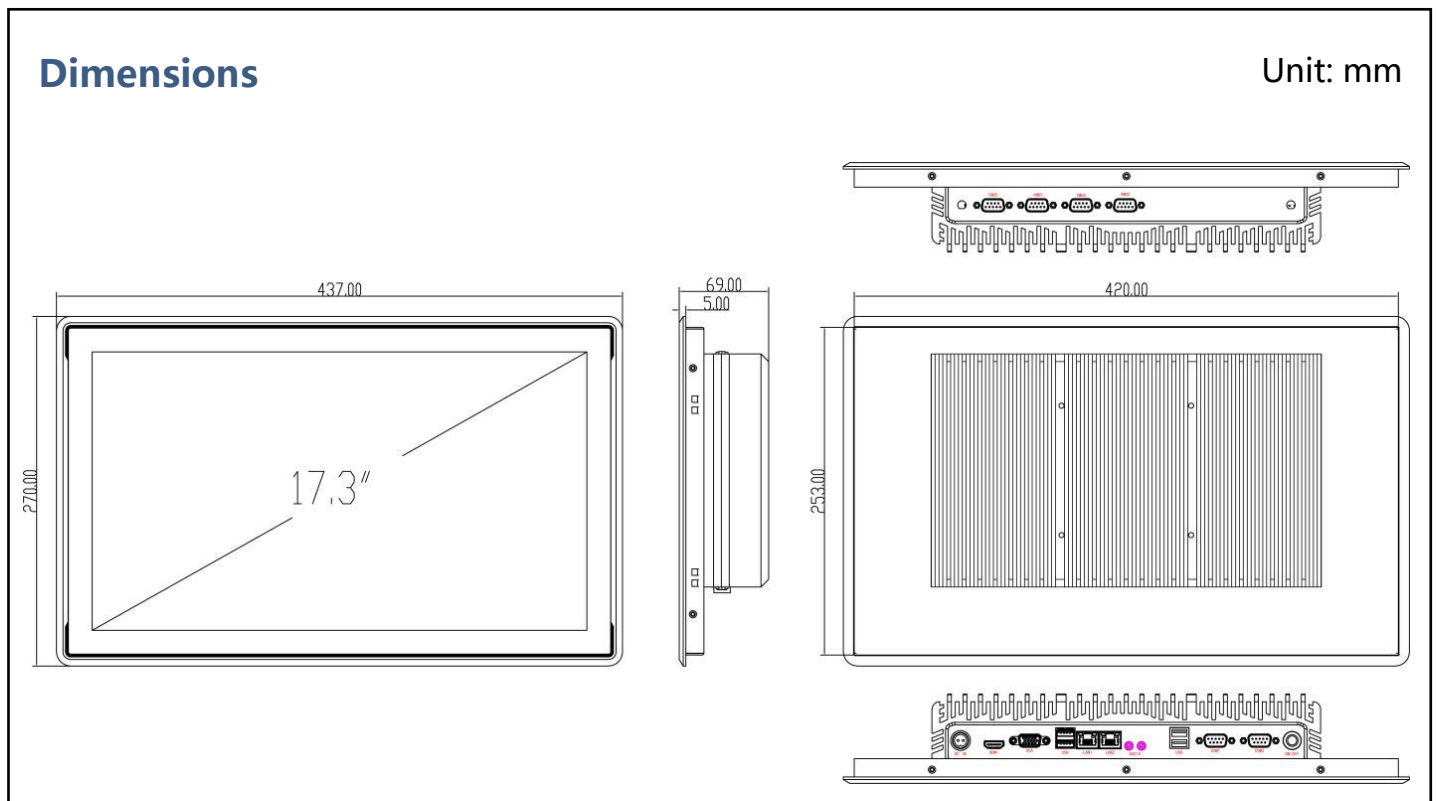



Packing List	Ordering Information
1x KLD-1762K	KLD-1762K: Projected Capacitive Touch Version
1x Driver CD	Operating Systems
1x Power Adapter	WIN7 32bit 64bit EN
Optional accessories	WIN8 32bit 64bit EN
VESA Bracket	WIN10 32bit 64bit EN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04