


# GTP156C1900 15"

## Capacitive X86 Windows industrial panel PC

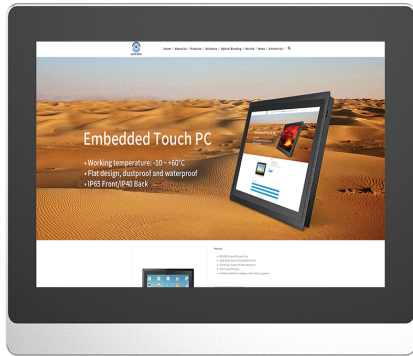

### Features

- Intel Celeron Quad Core J1900 CPU
- 2GB RAM & 32GB Industrial SSD
- 10-Finger-Multi Touch Capacitive Touch Panel
- IP65 grade standard water-proof,dust-proof for front panel
- 365 days\*24hours working for all-weather
- 2 years guarantee


### Specifications

PC System	CPU	Intel Celeron Quad Core J1900 2GHz
	Chipset	Intel Bay trail SOC
	Graphic GPU	Intel HD Graphics
	Audio	Integrated Audio Chip
	Memory	2G DDR3 (Optional:4G/8G)
	Storage	32G SSD (Optional:64G/128G/256G/512G/500G HDD)
	Network	RJ45, WIFI,3G,4G
OS	windows7,8,10,linux	
LCD Panel	IP Rating	IP65 Front/IP40 Back
	Screen Diagonal	15
	Display Active Screen	228.1×304.1
	Size(mm):	
	Aspect Ratio	4:3
	Physical Resolution	1024×768
	Colours Displayed	16.7M
	Brightness (cd/m <sup>2</sup> )	300, Max Be Customized To 1500
	Contrast	800:1
	Dot Pitch(mm)	0.264
	Typical Reaction Time (ms)	6.5
	Visual Angle Horizontal/Vertical (°)	85/85/85/85 (L/R/U/D) (Optional: IPS)
Backlight / Backlight Lifetime (hours)	Led/50,000	
Transmittance Rate	≤80%	

# Specifications

<b>Touch Panel</b>	Touch Technology	Capacitive 10-point Multi-touch
	Touch Connector	RJ45
	Touch Life (Contacts)	Capacitive ≥ 50,000,000
	Surface Hardness	6H
<b>Operation/ Mechanical</b>	Touch Induction Intensity	75g
	Operating Temperature	-10 ~ +60
	Relative humidity(RH)	95% (without condensation)
	Housing Material	Full body made of Aluminum alloy
	Housing Lx W x H	296.4×350.5×62.7
	Mounting	VESA75/VESA100
<b>Power</b>	Color	Slivery, Black
	Power Supply	100-240V 50-60HZ ACDC Active Switching; 12V -5A DC-Out
	Working Power	12V-5A
	Power Consumption	< 48W

## Pictures

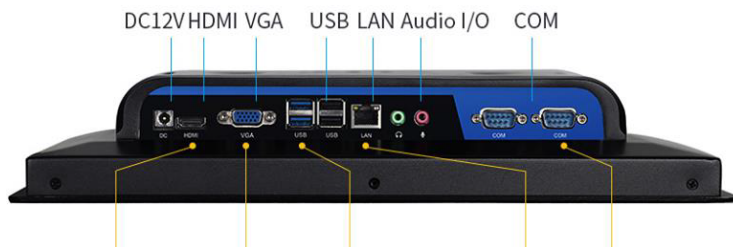

### Packing List

User Manual  
Installation Hook  
Power Supply

### External Connectors

2x USB2.0. 2x USB3.0  
1x DC 2.5  
1x HDMI (Support HDMI output,  
maximum support 1080P)  
1x VGA, DB15, RJ-45  
1x Audio I/O, 1x Realtek  
1x Realtek GB LAN 8111F, WOL-Wake On Lan  
1x SIM Slot (Optionals)  
2x COM