

UTC-W1592A

15.6inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 15.6 inch LED TFT LCD, capacitive touch
- Intel 10th Gen. Core I3/I5/I7 CPU
- 6*COM, 2*LAN, 6*USB3.0
- AT & ATX Model
- Front Panel IP65 Level




UTC-W1592A is an intelligent, fanless panel PC, 15.6" Panel PC equipped with an Intel® 10th Gen. Core processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 6 x serial ports, 6 x USB ports, make device connection and integration easy.

Specifications

Processor	CPU	Intel® i3-10110U Dual Core, 2.10-4.10 GHz 4M Cache, TDP 15W Intel® i5-10210U Quad Core, 1.60-4.20 GHz 4M Cache, TDP 15W Intel® i7-10510U Quad Core, 1.10-4.90 GHz 4M Cache, TDP 15W	
	Cooling System	Fanless	
	Memory	1x DDR4 2133Mhz SO-DIMM Sockets, up to 16GB	
	Storage	1*mSATA SSD Full Size, 1*M.2 NVME SSD	
	I/O ports		6xUSB3.0, Type-A COM: 6xRS232, DB9 Dual Display: 1xHDMI (1920*1200 @30Hz) 1xVGA (1920*1200 @30Hz) 1xAudio Expansion: MINI-PCIE
		Network(LAN)	2x 10/100/1000Mbps Ethernet
		Input Voltage	Input Voltage
Control SW/LED			Power Button, AT & ATX Model
LCD Display	Display Type:	15.6inch TFT LED Panel(LED Backlight)	
	Max. Resolution:	1920x1080/ 16:9	
	Luminance(cd/m ²)	300nits	
Touchscreen	Touch Type	Capacitive Touch	

OS Support	OS Support	Microsoft Windows 7/ Windows 8/ Windows 10/ Linux
Environment	Operating Temperature	0°C ~ 50°C (extend temperature optional)
	Storage Temperature	-10°C ~ 60°C
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(W*D*H): 396.5x246x72mm; Mounting Cut out (W*H): 379.5*229mm
	Weight	6.9KG N.W.
	Color	Black
	Material	Aluminum
	Certification	CE / UL / RoHS

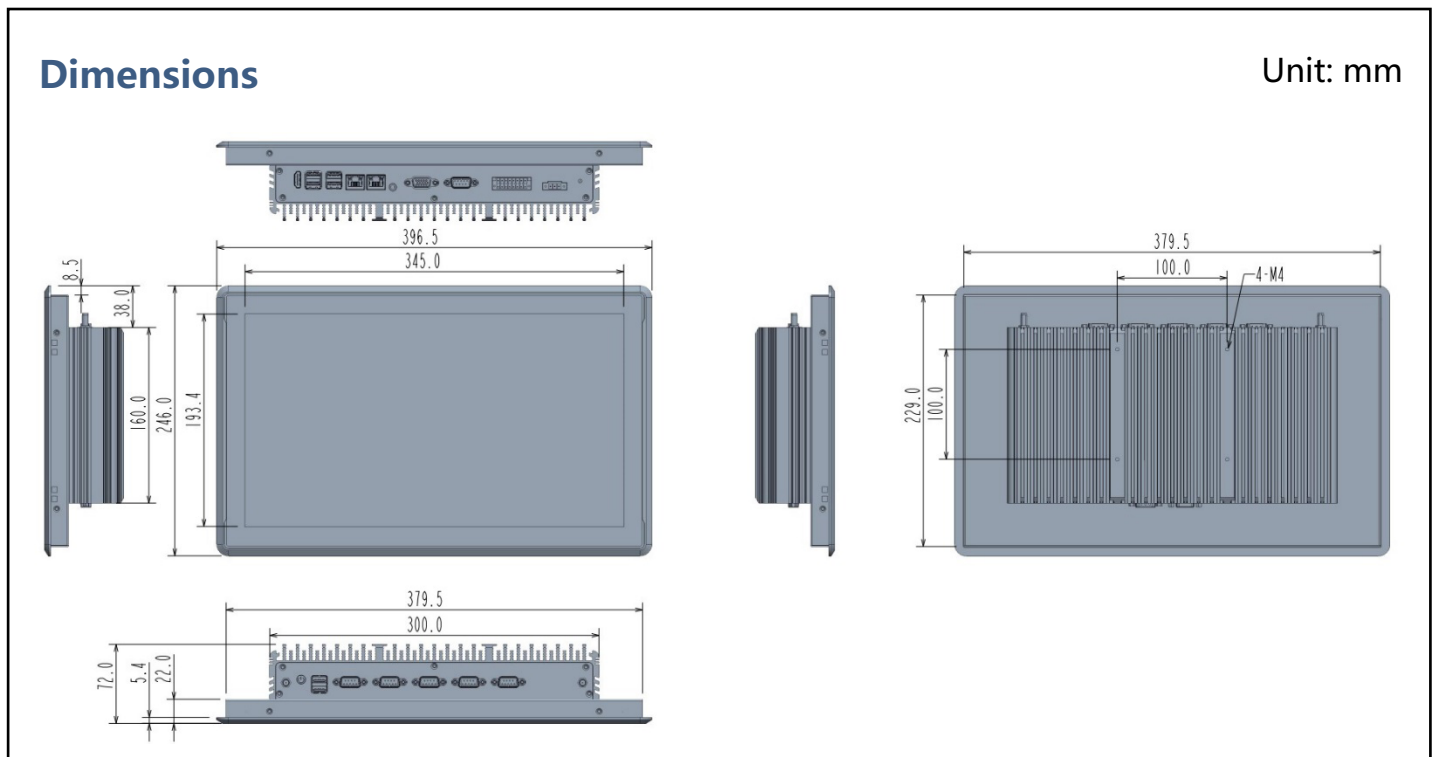



Packing List	Ordering Information
1x UTC-W1592A	UTC-W1592A: Projected Capacitive Touch Version
1x Driver CD	Operating Systems
1x Power Adapter	WIN7 32bit 64bit EN
Optional accessories	WIN8 32bit 64bit EN
VESA Bracket	WIN10 32bit 64bit EN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04