

# IPC - 604A



## Features

- Compact Aluminum Chassis, Fanless Design
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- HDMI+VGA Dual Independent Display
- DC 9~36V Wide Power Input


## Specifications

CPU	Intel Baytrail D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W
Cooling System	Fanless
Memory	Onboard DDR3L, max 4GB
Storage	mSATA SSD Full Size
I/O ports	5 xUSB2.0+1xUSB3.0, Type A COM: 6 xRS232 , DB9, 2*RS485 optional Dual Display: 1xHDMI ( 1920*1200 @30Hz 1*VGA (1920*1200 @30Hz) Audio: 1xMic in, 1x Line out WIFI: 802.11a/g/n, 2x2 Antenna, 2.4/5 GHz, 300 Mbps Max Speed
Network(LAN)	2x Intel I211 10/100/1000Mbps Ethernet
Input Voltage	12V DC 2 Pin Aviation Connector) , optional 9V 36V DC
Control SW	1xPower SW (Rear), AT/ATX optional
OS Support	Windows 7 Windows 8 .1, Windows 10 Linux Ubuntu
OperatingTemperature	-10 ~ 60 (14 ~ 1 40 ° F) ( extend temperature )
Storage Temperature	-20 ~ 75 (4 ~ 1 67 ° ( extend temperature )
Dimensions	(W*D*H): 209.2*15 8 *64 mm
Weight (G.W)	N.W. 1.5KG(3.3lb)
Color	Black
Material	High Strength Aluminum Alloy
Certification	CE / CCC



## Dimensions

Unit: mm

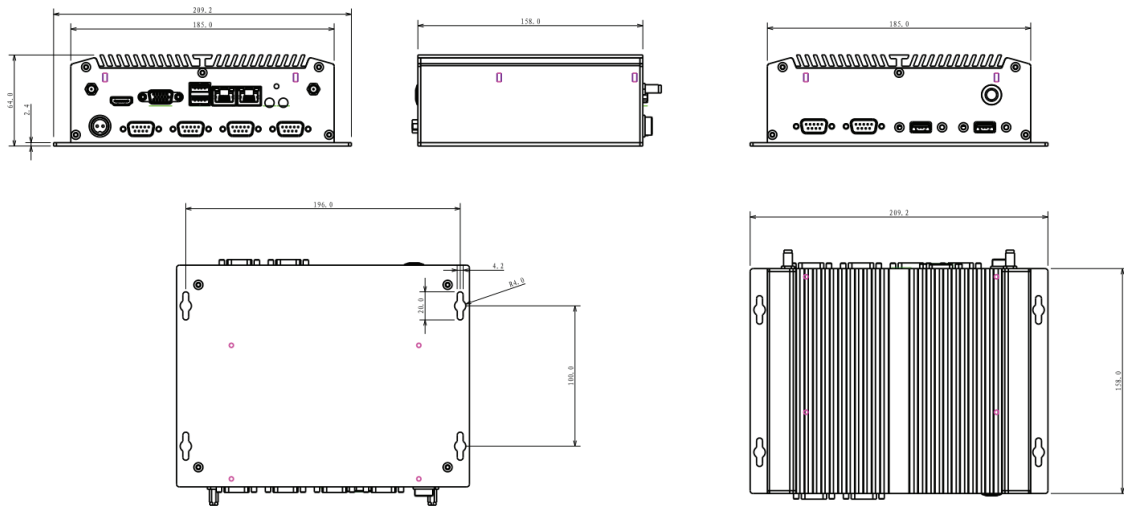

### Packing List

1x IPC 604A

1x Driver CD

1x Power Adapter

Optional accessories

Brackets

Power Cable 2 pin 200cm

### Ordering Information

IPC 604 A-1: J1900 Version

Operating Systems

WIN7 32bit 64bit ENG/CN

WIN8 32bit 64bit ENG/CN

WIN10 32bit 64bit ENG/CN

Ps : Default BIOS supports WIN7 32bit 64bit OS, WIN 8

& WIN 10 needs update BIOS.