

PPC-1731A 17inch Fanless Panel PC with Intel Core 3rd Generation Processor



Features

- > Intel Core 3rd Generation Processor
- > 17inch LED Panel with resistive / capacitive touchscreen
- > System memory up to 16GB DDR3
- > VGA and HDMI Dual Display
- > Fanless design and low power consumption
- > Supports SATA 2.5inch HDD and 1x mSATA socket
- > Front Panel IP64 Level
- > Supports Win XP/Win 7/ Win 8/ Win 10/ Linux OS



Introduction

PPC-1731A is a new, 17" Panel PC equipped with an Intel® Core 3rd generation processor. Meeting the demands of harsh environments, the fanless design makes the PPC-1731A extra reliable for applications in the machine building industry. In addition, the dual GbE LAN, 4 x serial ports, 4 x USB ports, make device connection and integration easy.

Specifications

Processor	CPU	Onboard Intel® Core 3rd Generation CPU, 1037U/i3/i5/i7
	Cooling System	Fanless
	Memory	Onboard 2GB DDR3, max 16GB Dual Channel
	Storage	32GB SSD+2.5" ' ' HDD
I/O	I/O ports	USB: 4xUSB2.0
		COM: 4xRS232, optional RS422/485
		Dual Display: 1xVGA, 1xHDMI
		Audio: 1xMic-in, 1x Line-out
	Expansion: MINI-PCIE	
Network(LAN)	2x Realtek 8111E, 10/100/1000Mbps Ethernet	
Power Consumption	Input Voltage	12Vdc(Aviation Connector) , optional 9V-36V DC
LCD Display	Display Type:	17inch TFT LED Panel(LED Backlight)
	Max. Resolution:	1280x1024
	Luminance(cd/m ²)	350nits
	Backlight Lifetime	30,000hrs (typical)
Touchscreen	Touch Type	5-wire Resistive Touch / Capacitive Touch
	Controller	USB interface

	Durability(Touches)	36 million
OS Support	OS Support	Microsoft Windows XP/ Windows 7/ Windows 8/ Windows 10/ Linux
Environment	Operating Temperature	-10°C ~ 60°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-20°C ~ 70°C(-4 ~ 158 °F)
	Front Panel Protection	IP64 compliant
Mechanical	Dimensions	384(W)*318(D)*49(H)mm
	Weight	3.5KG(7.72lb)
	Color	Sliver
	Material	High Strength Aluminum Alloy Front Panel, Back Cover Fanless Al-alloy Radiator

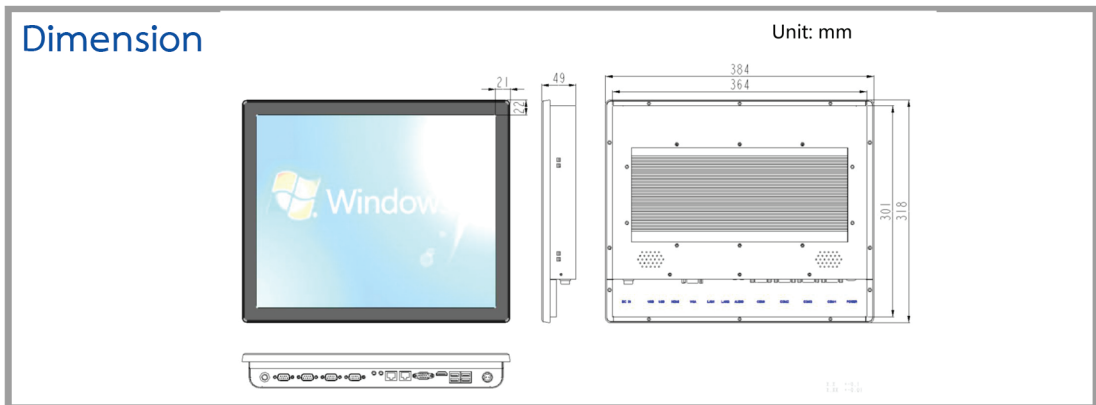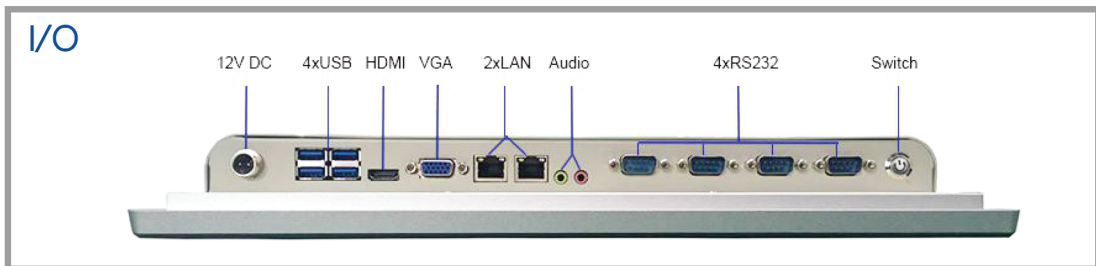

Packing

11x PPC-1731A, 1x Driver CD, 1x Power Adapter

Operating Systems

WIN XP SP3 32bit ENG

WIN7 32bit 64bit ENG

WIN8 32bit 64bit ENG

WIN10 32bit 64bit ENG

Ps: Default BIOS Support WIN7 32bit 64bit OS,

WIN8&WIN10 needs update BIOS

Ordering Information

PPC-1731A-01-1: 1037U 2G RAM 32G SSD

PPC-1731A-01-2: 1037U 4G RAM 64G SSD

PPC-1731A-02-1: i3-3217U 2G RAM 32G SSD

PPC-1731A-02-2: i3-3217U 4G RAM 64G SSD

PPC-1731A-03-1: i5-3317U 4G RAM 32G SSD

PPC-1731A-03-2: i5-3317U 4G RAM 64G SSD

PPC-1731A-04-1: i7-3517U 4G RAM 64G SSD

Optional accessories

VESA Bracket

Power Cable 2-pin 200cm